

6watt Recessed Round Light

Model No.

RS-SRR3, RS-SRR3-BC, RS-SRR5, RS-SRR5-BC

The Redilight 6watt small recessed downlight was designed with emphasis on both aesthetics and performance.

When combining a superior finish with the exceptional performance of SMD LED's you have a light that lasts for many years suiting almost any application.

Note: 'The splitter box is to be used in conjunction with the 6watt downlights only. The 6watt downlights plug into the splitter box first to create either a 12 or 24watt load, the splitter box lead is then plugged into the Redilight Driver'.

Specifications

Construction	Aluminium
Finish	White Powder coated, Brushed Chrome
LED	SMD
Number of LED's	30
Drive voltage	29~32VDC constant current
Power	6watt
Lumens	600-700Lm
Colour Range	3000k or 5000k
Average Life	>50,000hrs
Beam Angle	120°
Environmental Conditions	IP20
Light Engine	Ceramic Substrate with aluminium PCB
Size	Overall 110mm, Cut out 90mm
Warranty	7 years
Diffuser	Acrylic (PMMA)



White trim




Brushed chrome trim




Splitter box


Dimensions

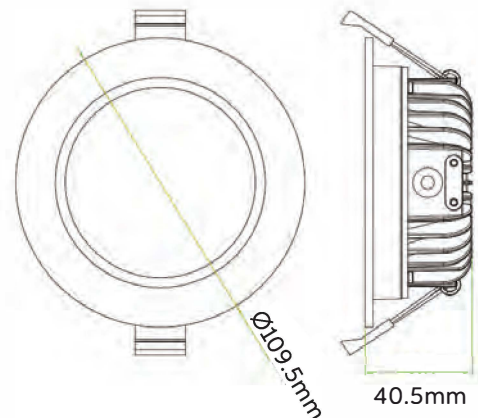

Photometric Data

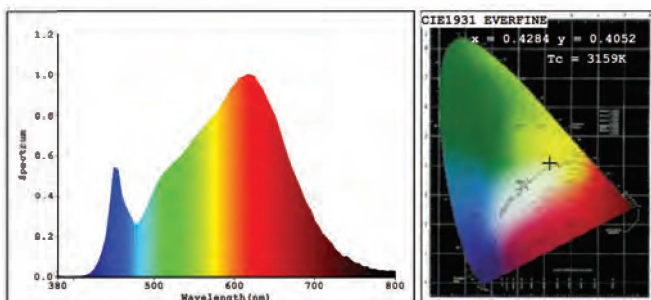

3000K

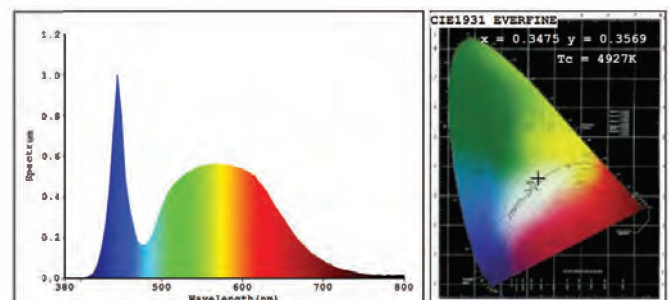

5000K